

UNIX

Full face mask **UNIX 6200**



Reliable
protection




One-size-fits-all



Lightweight



Resistant to
fogging

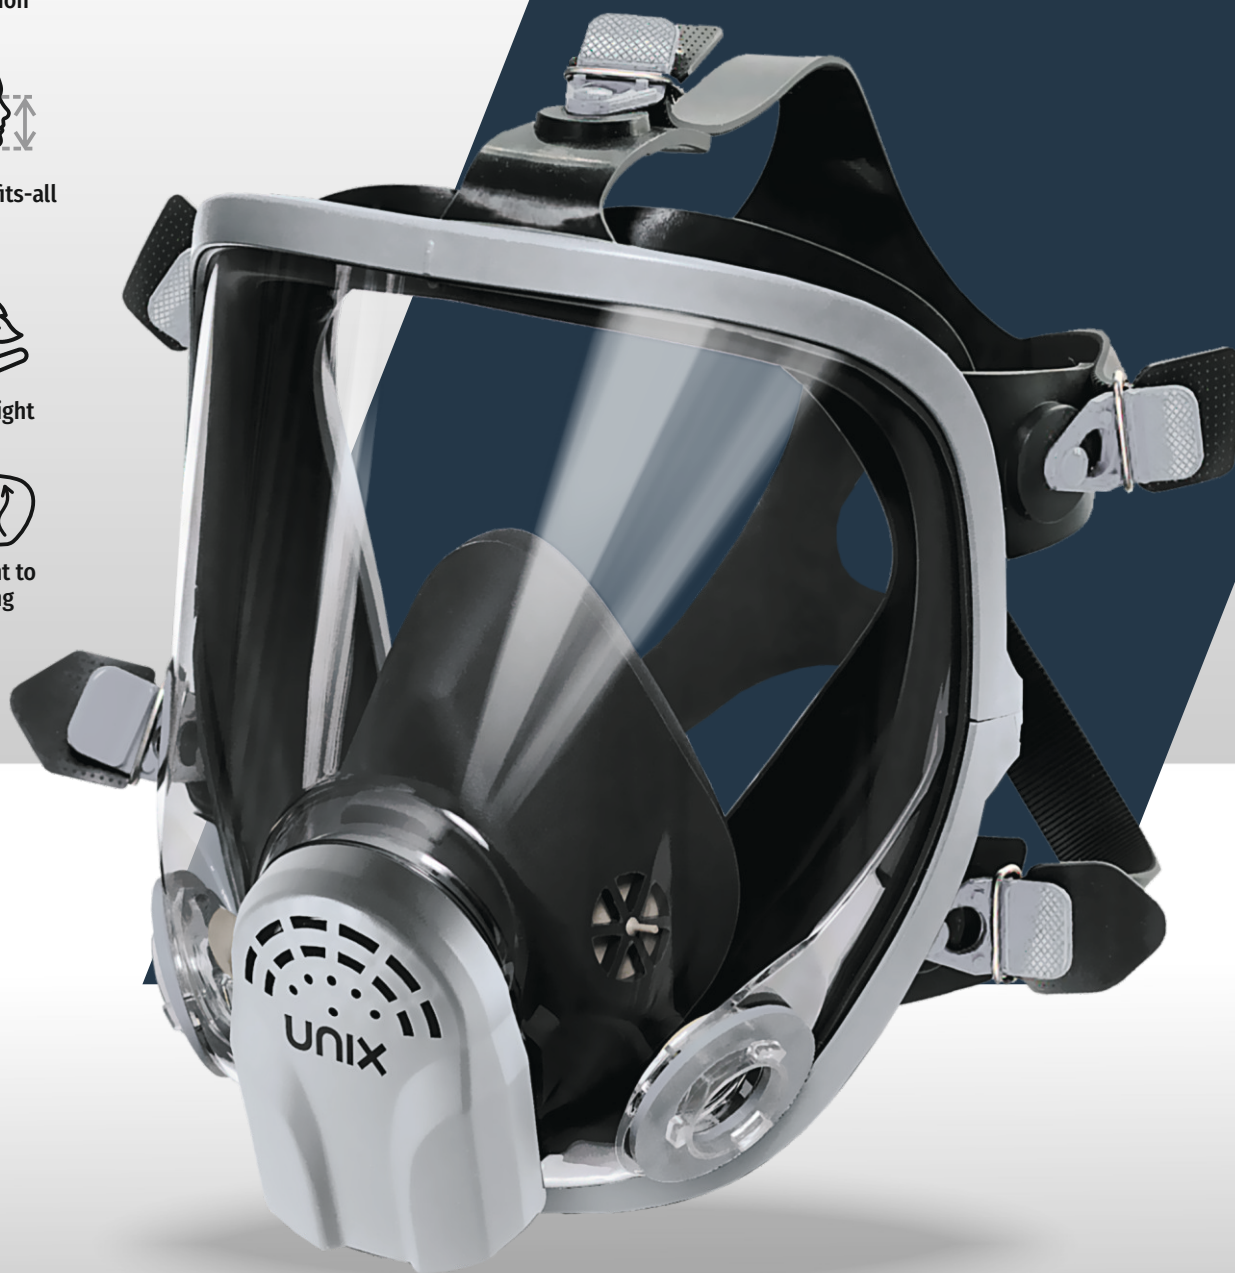

PREMIUM



MADE IN THE RUSSIAN FEDERATION

Conclusion of the Ministry of Industry and Trade on No. 719 PP of the Russian Federation

**ZELINSKY
GROUP**

Full face mask

UNIX 6200

PREMIUM

One-size-fits-all, lightweight, resistant to fogging visor, and a wide range of compact and spacious filters make this PPE convenient and effective.

One-size-fits-all

- one size for all types of faces
- lack of the re-sorting of products in warehouses
- reliable fixation

Five point head harness

- good balance of the mask
- quick adjustment with self-tightening buckles
- easy to put on and take off
- low profile provides a comfortable combination with protective helmets

Parts in contact with a face are made of silicone

- increased strength of the head harness, the seal and the inner mask
- elasticity of the mask from exposure to high and low temperatures

Large polycarbonate visor with a view angle of more than 80°

- good visibility and convenience when using the mask with filters, the ability to see moving parts of mechanisms and obstacles

Polycarbonate lens with coating

- anti-fogging coating as standard
- possibility of completing with polycarbonate lens with a chemically resistant coating

Inner mask

- preventing of the visor fogging and reducing carbon dioxide content in inhaled air

Speech device

- speech intelligibility 90%
- ability to work with means of communication

Protective screen

- protection of the speech device
- exhalation is directed downwards - it excludes the effect of air flow on the working surface
- removable protective screen allows hygienic cleaning of the exhalation valve

Bayonet filter connection system

- fast and reliable mounting system of gas, particle and combined filters

Options

- lens protector (film)

Replacement part, available to order

- head harness
- protective screen
- inhalation valve discs
- exhalation valve discs
- sealing rings

Weight – 500 g

- comfort during the entire work shift due to the low weight of the mask

operating temperature of the mask is from -40°C to +40°C

Increased safety during operation

- compliance with the requirements of the 2nd category, operation in heavy condition of work as part of filtering or insulating PPE



Guaranteed storage life 5,5 years

Compliance with regulatory documents

TR CU 019/2011, GOST
12.4.293-2015 (category 2)